MacFi-mp

MPEG DIGITAL AUDIO RECORD / PLAY SYSTEM

MACKENZIE

CONFIG SWITCHES

OFF ON

1	2	
		Repeat
▫	▫	Play message **One** time
▫	▪	Play message **Two** times
▪	▫	Play message **Three** times
▪	▪	Play message **Four** times

3	4	
		Delay
▫	▫	**1** sec delay
▫	▪	**5** sec delay
▪	▫	**10** sec delay
▪	▪	**30** sec delay

5	6	
		Operation Mode
▫	▫	Standard Operation
▫	▪	Play one sequence per closure
▪	▫	Play while active
▪	▪	Re-trigger

7	
	Play Next
▫	Disable
▪	Enable

8	
	Memory Protect
▫	Enable record
▪	Disable record

STATUS

RECORD Indicator
FLASH, Set up mode; ON, Recording

AUDIO SENSE Indicator
ON, Audio signal present; OFF, No audio detected

OVERDRIVE Indicator
ON, Input overdriven; reduce input signal level;
OFF, Input not overdriven


RECORD SETUP Button
Push to enter/exit Record Setup Mode

MESSAGE SECTION


START/STOP Button
Push to Start/Stop record or play function

SELECT Button
Select message to be recorded or played


Message Indicators

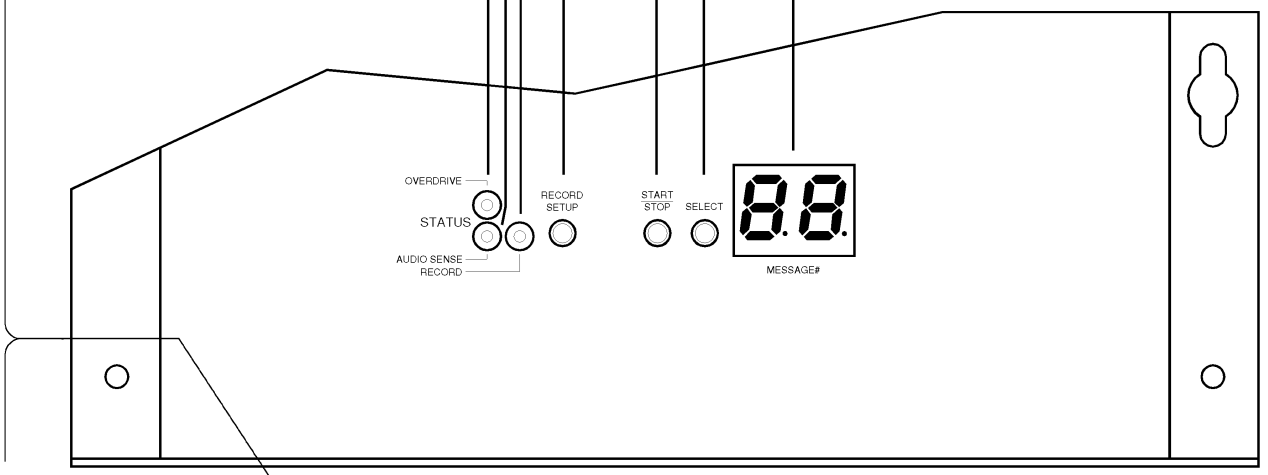

TOP

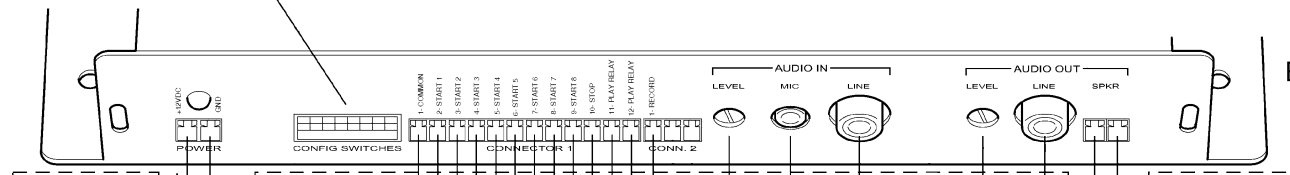

BACK

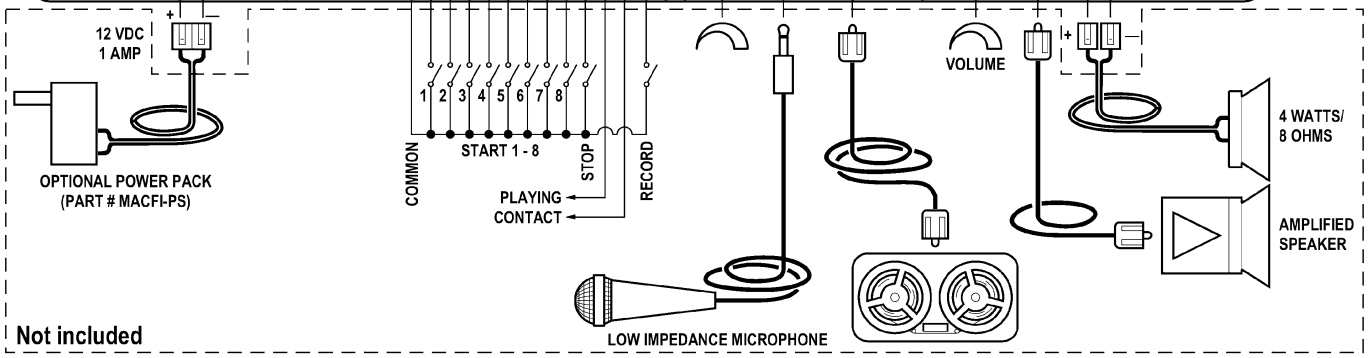

MacFi-mp Quikey
V 1.0 04/24/2003
Mackenzie Laboratories, Inc.